

ALPHA ANTENNA -Mag-Loop Antenna 6m, VHF and UHF Add-On (Installation)

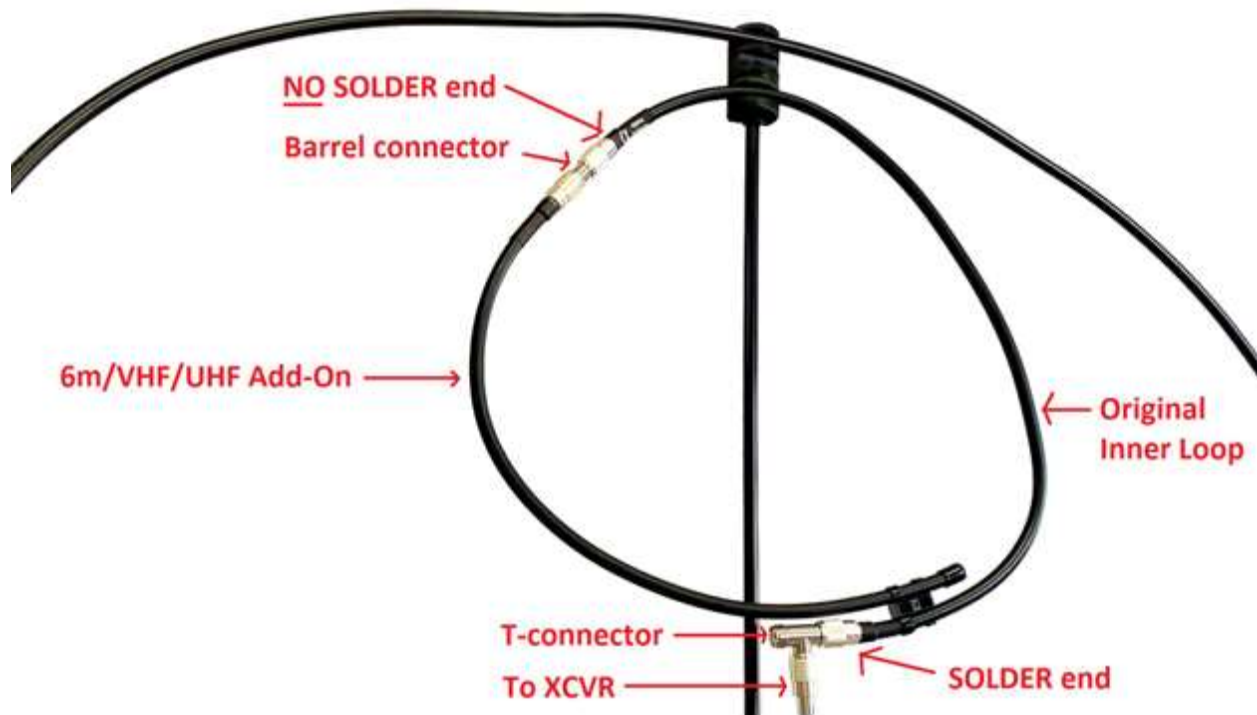


IMAGE 1

Installation Instructions:

1. Remove the Inner Loop from the Mag-Loop Antenna.
2. Remove the coax T-connector from the inner loop.
3. Identify the inner loop's PL-259 coax connector WITHOUT solder on the center conductor.
4. Use the barrel female-to-female coax connector that was included with the 6m/VHF/UHF add-on element to connect to the inner loop's coax connector WITHOUT solder.
5. Connect the coax T-connector to the other end of the inner loop (i.e. the end with the PL-259 coax connector that has solder on the center conductor.)
6. Bend the now enlarged inner loop into a circular shape.
7. Clip the new inner loop onto the outer loop of the antenna.
8. Connect your transceiver to the vertical stem of the coax T-connector.
9. Your 6m/VHF/UHF add-on is now installed and ready for operation, no additional tuning is usually required.

YOUTUBE - How to install the VHF UHF 6M add-on element on the 100W 10-40M Alpha MagLoop Magnetic Loop Antenna <https://www.youtube.com/watch?v=LJOHx0nHLXE>